Ωmega®
The Ultimate Lubricant

89

OMEGA 89 Ultra Heavy Duty Grease

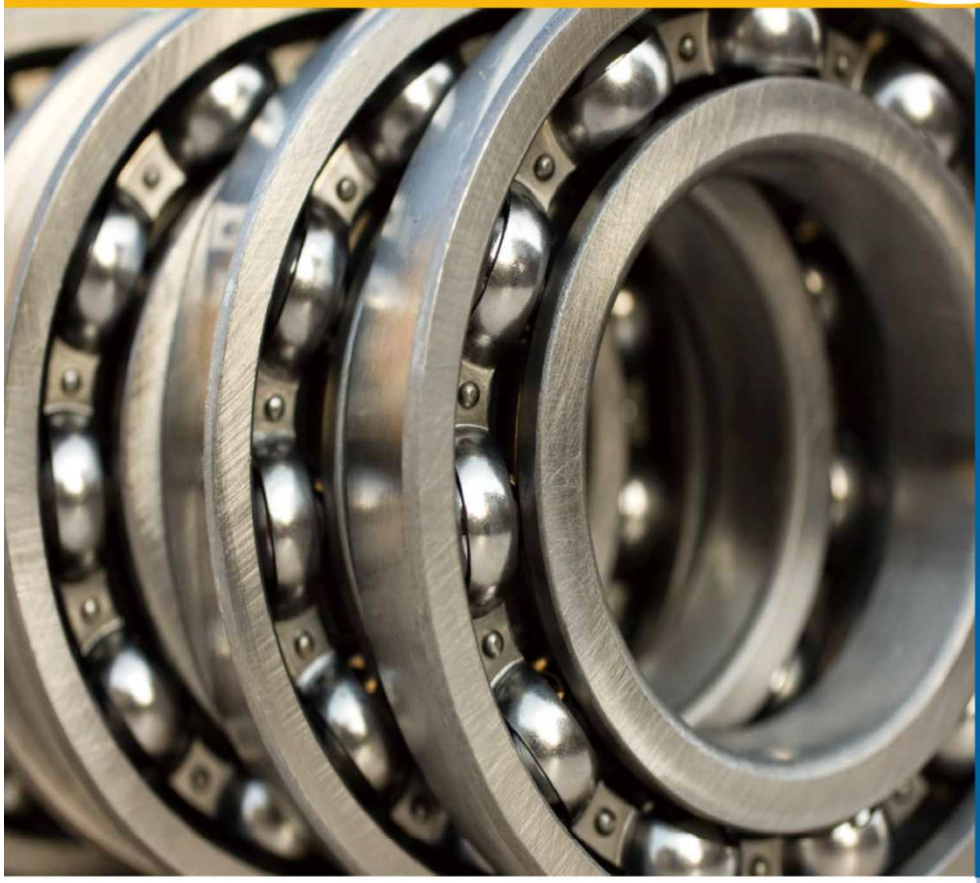

Ultra Heavy Duty Grease

TRUST OMEGA TO
Save Money
Enhance Performance
Extend Service Life

超高荷重用グリース

- 優れた耐荷重性・腐食性・耐水洗性
- マルチコンプレックス増稠剤システムで特別に開発し、残渣が形成される危険性を減少させる為に、固形潤滑剤は含有していません。
- 湿気が多い条件と高負荷環境で稼働するベアリングや機械部品の寿命を遥かに延ばします。

ITW PERFORMANCE POLYMERS & FLUIDS®
KOREA

ITW

OMEGA 89 Ultra Heavy Duty Grease

OMEGA ULTIMATE LUBRICANTS

オメガ潤滑剤輸入販売元
株式会社アルファ・テック
TEL：06-6729-0031

製品概要：

・超高荷重用グリースは、保守のプロが求める「効率性と効果的な整備」を満足出来るように開発されました。

・マルチコンプレックス増徴剤を使用し、特に高荷重・極圧性・耐水性の性能を最大限発揮出来ます。

・ベアリング、摺動部、機械部品に残渣を残す原因となる固形潤滑剤（添加剤）は含有しておりません。

・優れた圧送性があり、集中給脂システムにも使用可能。

・高荷重・湿気環境下の全てのタイプのベアリングを保護し、本来の潤滑性能を発揮します。

・作業上、水を避けがたい重工業界でも使用出来る様に、特別な腐蝕防止剤の働きにより機器を長期間保護して寿命・給油期間を延ばします。

“Four-Ball Weld Load”Test：四球極圧荷重テスト
８００ｋｇ以上のスペックです。

使用箇所：

過酷な条件下で稼働する設備・水の掛かる設備
・製紙・パルプ工場・製鉄工場・鉱山設備
・全てのタイプのボール・ローラーベアリング
コロ軸受・メタル・ジョイント部・LMガイド
ボールねじ・カップリング・工作機械・加工機

稠度	2号
滴点	260℃
増徴剤	Li-Ca マルチ コンプレックス
ティムケンOKロードポンド	<800kg
使用温度範囲	-30℃~150℃
色	赤

Ωmega®
The Ultimate Lubricant

ITW PPFK reserves the right to modify or change this product for purposes of improving its performance characteristics.
© 2016 ITW PP & F Korea Limited

The Omega Trade Mark is the property of ITW Inc., and is used under licence by ITW PP & F Korea Limited.

ITW PERFORMANCE POLYMERS & FLUIDS KOREA

The information contained in this publication is to the best of our knowledge and accurate at the time of issue in October, 2016